
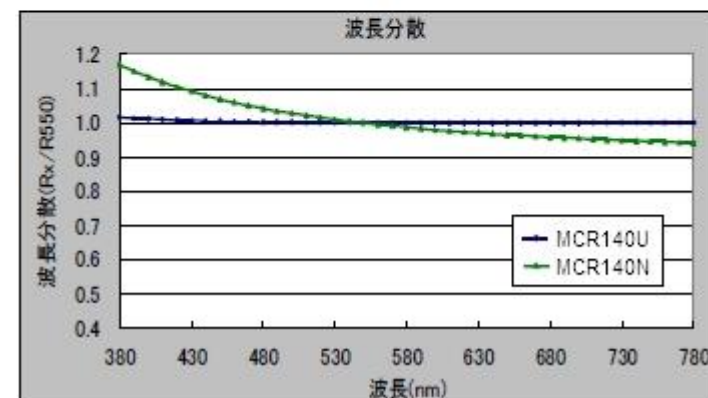


Specification for MCR140N

MCR140N

項目 ITEM		単位 UNIT	規格 SPEC	
寸法 SIZE		mm	500 × 1000	
有効部厚 Thickness		μm	70	
耐久性 Durability	85°C × 1000h			
	60°C × 90% RH × 1000h			
	-40°C × 1000h			
光学特性 Optical Properties	単体平均透過率 ave single transmittance	%	90.17	
	Transmittance 380nm	%	89.2	
	Retardation Value	at 550nm	140 ± 10	
	位相差値波長分散性 Wavelength dispersion	450/550		1.070
		650/550		0.965
	色相 Hue	L*s	-	96.07
		a*s	-	-0.18
		b*s	-	0.38
	写像鮮明度	0.05	-	85.2
		0.10	-	96.6
0.50		-	97.1	
1.00		-	97.3	
2.00		-	98.7	

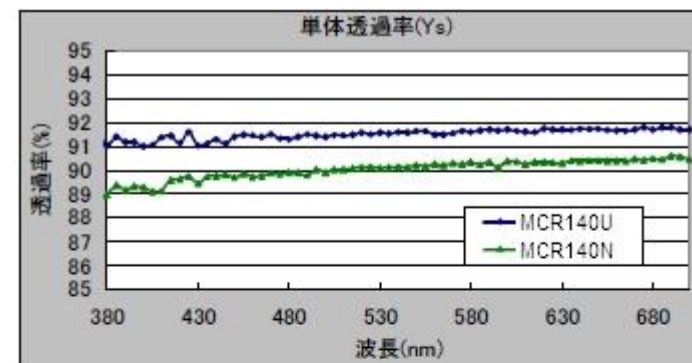

Remedies and Limitations

Should any product fail to perform as warranted or for any other claims arising from the purchase of products from us, our liability and your remedy are strictly limited to the purchase price or replacement, at our sole option, of the product sold.

Please refer: <http://www.mecanusa.com/order-info.html>

納入製品の保証条件と責任範囲

製品の品質には常に万全を期していますが、万一のトラブルを回避するため、ホームページ上で販売に関する規定を設けています。

8 項「偏光板等光学板の保証」及び 9 項「責任の制限」におきましては、特にご留意頂きたいお願い致します。

取引条件記載 URL: <https://www.mecan.co.jp/product/orderinformation.html>